



**When permitting default access of READ or above to dataset profiles, which of the following do you typically use?**

Responses	Count	Percent %
UACC(READ or above)	22	35.5%
UACC(NONE) and PERMIT ID(*) ACCESS(READ or above)	36	58.1%
Both methods about equally	1	1.6%
Neither - almost never grant default access	3	4.8%
<b>Total</b>	<b>62</b>	<b>100.0%</b>

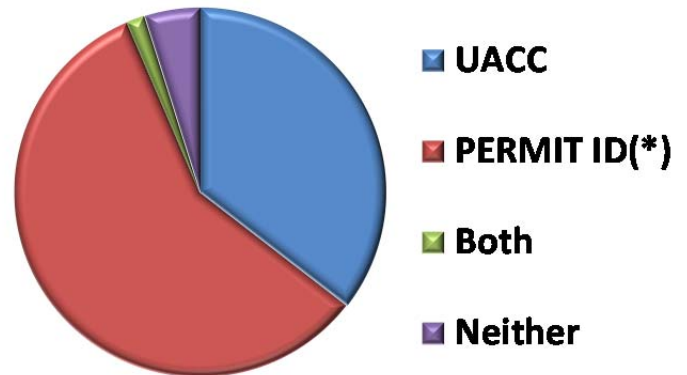

**When permitting default access of READ or above to general resource profiles, which of the following do you typically use?**

Responses	Count	Percent %
UACC(READ or above)	19	30.7%
UACC(NONE) and PERMIT ID(*) ACCESS(READ or above)	38	61.3%
Both methods about equally	1	1.6%
Neither - almost never grant default access	4	6.5%
<b>Total</b>	<b>62</b>	<b>100.0%</b>

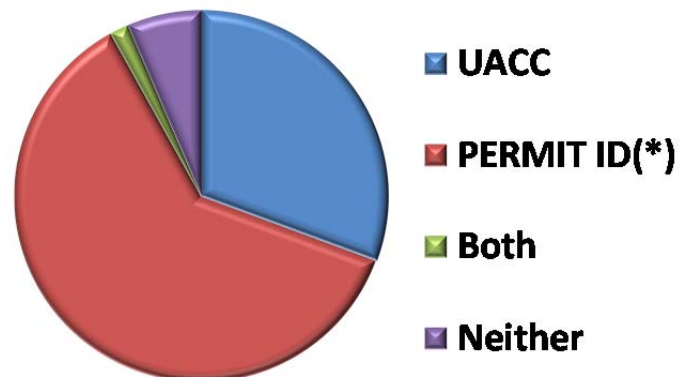

**92% of the respondents gave the same response for both questions.**